# EASY ACCESS WITHOUT KEYS

Heavy-duty mechanical locks with full size lever handles, allowing use as the primary lock on doors.

The CL500 range of mechanical locks offer a variety of options. Allows the user flexibility on how to manage entry – by key, code or 'code free' entry. Throwing the deadbolt on the mortice lock models will lock out the code users when appropriate. A safety feature ensures that the inside lever handle will retract the deadbolt so avoiding accidentally locking a person in the room. Front and back plates can be purchased for use with existing locks.

## **FEATURES**

1

P

CODELOCKS. COM

<u> 1500</u>

mechanica

- Heavy-duty Codelock
- PVD low maintenance finish
- Full size lever handles
- 12 options available
- 2,047 non sequential codes available
- Code Free option available
- Mortice Latch and Mortice Lock functions
- Available in stainless steel or polished brass finish
- Suitable for internal and external use
- Limited lifetime guarantee\*
- Codelocks Fire Kit Packs can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with BS EN 1634-1: 2008

### FUNCTIONS



### **Front and Back Plates**

**OPTIONS** 

Latch Options:

**Code Free Option:** 

60mm (23/8") backset requires

70mm (2¾") backset requires

The outside lever will retract the

latchbolt without using a code.

25mm (1") hole, 82mm (31/4") deep.

25mm (1") hole, 92mm (35/8") deep.

Front and back plates only for use with existing mortice latch or lock. The existing lock must have either a fixing hole 22 mm ( $7/8^{\circ}$ ) below follower (spindle) or two horizontal holes either side of the follower 38mm ( $11/2^{\circ}$ ) centres.



### Mortice Latch

Tubular mortice latch locks. Medium-duty stainless steel latchbolt head with 'anti-shim' deadlocking plunger, 8mm (<sup>5</sup>/<sub>16</sub>") follower. The outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

Back to Back Option (BB):

Provides coded access in both

Extra long spindle provided to

work with most single point panic

on both sides of the door.

Panic Kit Option (PK):

directions.

pads or bars.

Two coded plates for installation

# Mortice Lock

CL520

Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown. Supplied with double Euro profile cylinders with three keys. The key will open the door for management functions.

For further product model

options see price list.

### **APPLICATIONS**






#### **Code Change Method**

Requires removal of lock from door. Locks are supplied with a random code commencing with the 'C' clear button. To change the code after fitting, the lock must first be removed from the door. The code is non sequential, i.e. the code can be entered in any preferred order (e.g. 1234 can be 4321 or 1342). A total of 2,047 different codes are available - any of which can be entered in any order.

# **TECHNICAL SPECIFICATIONS**

Options	12 available
Spindle Type	Two part 8mm ( $^{5}\!/_{16}$ ") spring loaded spindle
Material	Zinc Alloy
Door Thickness	35mm – 60mm (1 <sup>3</sup> / <sub>8</sub> " – 2 <sup>3</sup> / <sub>8</sub> ")
Buttons	12 stainless steel buttons
Non Handed	Locks will fit doors hung on the left or right
Fitting Options	Vertical
Finish	PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (polished brass)
Codes	2,047 non sequential codes available
Code Storage	Single Code
Standards	Codelocks Fire Kit Packs can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with: BS EN 1634-1:2008
Suitable For	Internal and external use

# PRODUCT DIMENSIONS

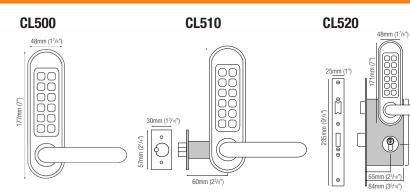

\*Codelocks mechanical locks will be repaired, serviced or replaced free of charge if they develop a manufacturing fault. Faults caused by misuse, abuse and/or poor fitting are not covered by the guarantees.



www.codelocks.com

72mm (2<sup>7</sup>/8")

155mm (61/8")



cluk2017v<sup>-</sup>